


**\*Pin Assignment 1:1**

P1		P2
1	WHITE	1
2	GRAY	2
3	YELLOW	3
4	PINK	4
5	ORANGE	5
6	RED	6
7	BROWN	7
8	GREEN	8
9	BLUE	9
10	PURPLE	10
11	LIGHT GREEN	11
12	LIGHT BLUE	12
13	BLACK	13
14	WHITE/BLACK	14
15	GRAY/BLACK	15
16	YELLOW/BLACK	16
17	PINK/BLACK	17
18	ORANGE/BLACK	18
19	RED/BLACK	19
20	BROWN/BLACK	20
21	GREEN/BLACK	21
22	BLUE/BLACK	22
23	PURPLE/BLACK	23
24	LIGHT GREEN/BLACK	24
25	LIGHT BLUE/BLACK	25
	SHIELD	SHIELD

- Material:**
- Cable: NOUL 30AWG\*25C+D+AL/MY
    - OD: 6.5MM
    - Color: Beige
  - Connectors: DB 25 Pin Soder Type
    - Pin G/F
    - Shell: Ni-Plated
    - Insulator Color: Blue
  - Inner Jacket: Clear LD-PE
  - Outer Jacket: PVC (Beige)
  - Screw: #4-40UNC Type, Nickel Plated
- Electrical:**
- 100% Open short & mis wire test
  - Contact Resistance: 5Ω Max.
  - Insulation Resistance: 10Ω Min.
  - Hi-Pot: 300V DC / 10MS

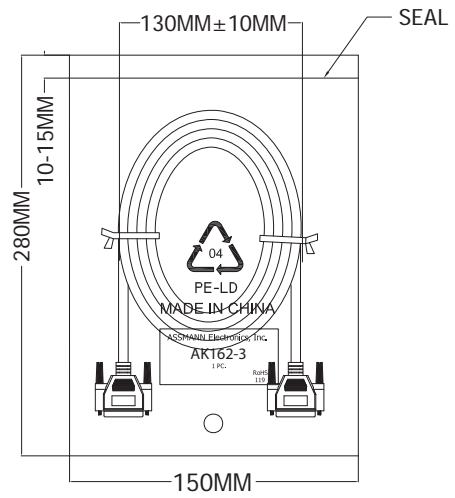

Unit: mm



Scale	Free				Date	Name	
TOLERANCE					Drawn	10.08.15	Wilson
X.X	±0.40				Approved	10.08.15	Groll
X.XX	±0.25						
X.XXX	±0.15						
DIM	TOL						
X.°	±3°						
X.X°	±X°						
Angle	TOL						
Id.	Modification	Date	Name				

Title		Serial/Parallel connection cable	
		25 pin male ↔ 25 pin male, 3 meters	
ASSMANN WSW-No.		AK162-3	
Drawing-No.		rev00	
Replace	Sheet	1/1	