


CONDUCTOR CONSTRUCTION (N/mm) :  
41/0.16AS

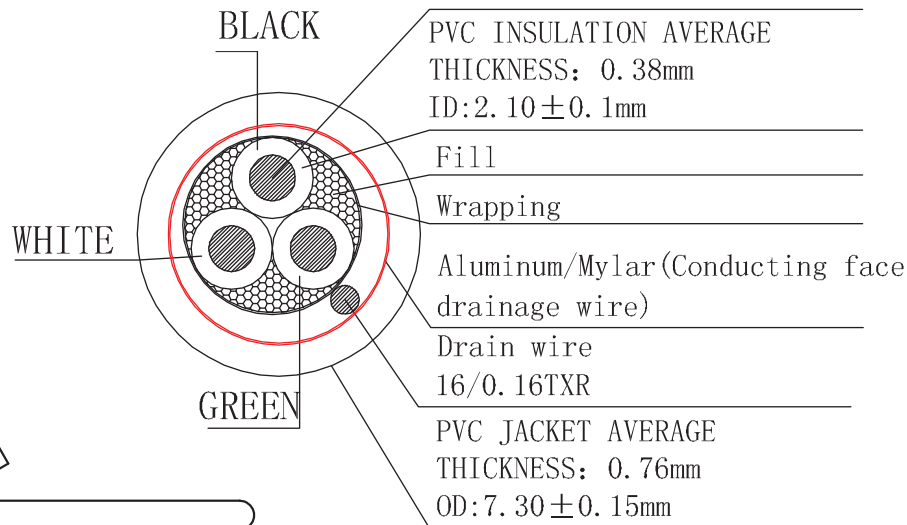


**Material:**

- E243711(UL) SVT 3 x 18AWG(0.824MM<sup>2</sup>)  
VW-1 Shielded, 60°C 300V  
- CSA 228191 SVT 3 x 18AWG(0.824MM<sup>2</sup>)  
FT2 Shielded 60°C 300V -LF-
- Jacket Color: Black
- E - Green; L - Black; N - White

**Electrical:**

- 100% Open & Short Testing
- Insulation Resistance: 100MΩ (Min.)
- Voltage: 500V DC / 1 Min.

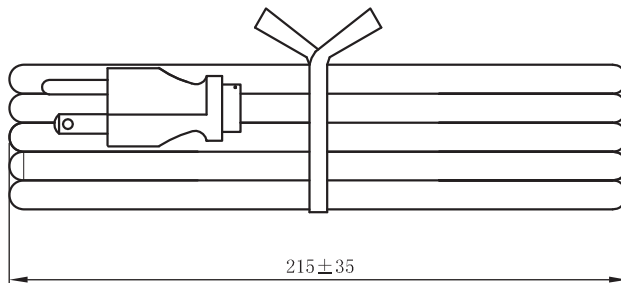

Unit: MM



ITEM NO.

**AK500-OE-5-2-R**

TITLE

Power Cord - SVT/Open End, Shielded, 60°C,  
18AWG, 2 Meters

**ASSMANN**  
Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
Toll Free: 1-877-277-6266 • Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED  
©Copyright 2011 by Assmann Electronic Components  
All International Rights Reserved