

1

2

3

4

5

6

7

A

A

B

B

C

C

D

D

E

E

F



F

G

G

H

H

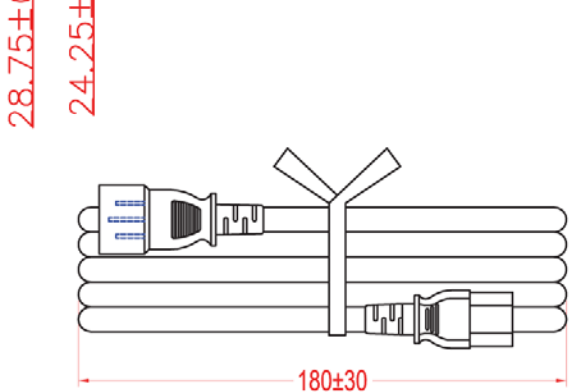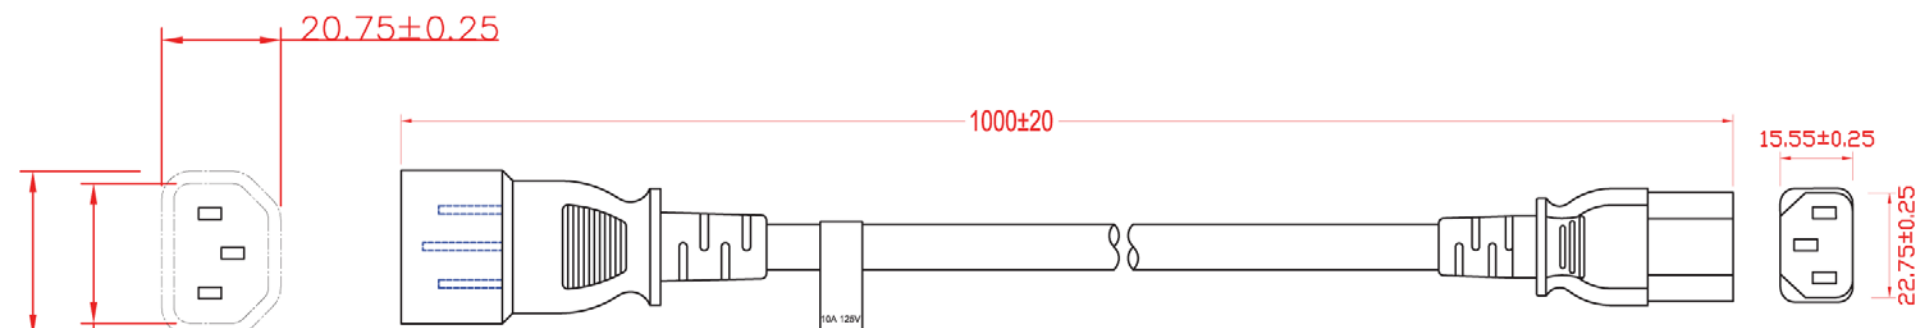

BLACK  
WHITE  
GREEN

COPPER CONDUCTOR(N/mm):  
40/0.162±0.005 or Substitute

PVC INSULATION AVERAGE  
THICKNESS: 0.38mm  
ID: 2.10±0.1mm

DENIER:1500d

PVC JACKET AVERAGE  
THICKNESS: 0.76mm  
OD: 6.30 ±0.2mm

Material:  
 . SVT 3x18AWG(0.824MM<sup>2</sup>) VW-1 Unshielded, 60° 300V  
 . Jacket Color: Black  
 . E- Green; L- Black; N- White

Electrical :  
 . 100% Open & Short Testing  
 . Insulation Resistance : 100meg-ohm(Min.)  
 . Voltage : 500V DC / 1 Min.

Unit: mm



Scale	Free						Date	Name
TOLERANCE						Drawn	27.12.11	Chappell
X.	±X					Approved	21.06.13	Groll
X.X	±X							
X.XX	±X							
DIM	TOL							
X.°	±X°							
X.X°	±X°	①	Updated all information	21.06.13	Wilson			
Angle	TOL	Id.	Modification	Date	Name	 1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us		

Title	Power cord - IEC Extension
	SVT, 18AWG, 60°C, Unshielded, 1 meter
ASSMANN WSW-No.	AK500-OE-11-1
Drawing-No.	
Replace	rev01
Sheet	1/1

1

2

3

4

5

6

7