


CABLE WHITE PRINT
 HI-SPEED USB Revision 2.0 SHIELDED 28AWG/1P+24AWG/2C
 E189529 AWM STYLE 2725 80° C 30V VW-1

PIN ASSIGNMENT:

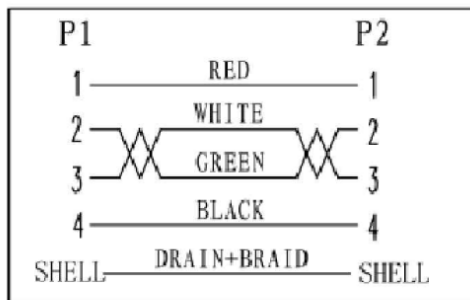

P/N	L(mm)	tolerance
AK672/2-1-BLACK-R	1000	±30
AK672/2-2-BLACK-R	2000	±50
AK672/2-3-BLACK-R	3000	±50
AK672/2-5-BLACK-R	5000	±50

Electrical test:

1. 100% short, open, miswire test
2. Conduct resistance: 2 Ohm(max)
3. Insulation resistance: 10Mohm(min)
4. dielectric test: DC 300V

NO.	NAME	Q'TY	SPECIFICATION
⑧	PE BAG	1/10	CLEAR SIZE:280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS".
⑦	PE BAG	1	CLEAR SIZE:130*230*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC".
⑥	TIE	2	BLACK L=100mm
⑤	OUT JACKET	6g	BLACK PVC-40P (MOULD NO:WM-65)
④	OUT JACKET	6g	BLACK PVC-40P (MOULD NO:WM-40)
③	CABLE	1	BLACK USB2.0 UL2725 28#/1P+24#/2C+AEB OD:4.7mm
②	CONN	1set	USB2.0 B MALE SHELL:NICKEL PIN G/F 3PCS TYPE INSULATOR COLOR:WHITE
①	CONN	1set	USB2.0 A MALE SHELL:NICKEL PIN G/F 4PCS TYPE INSULATOR COLOR:WHITE

RoHS compliant

Unit:mm

Scale	FREE	Date	Name	Customer-No.
TOLERANCE		Drawn	11.02.2014	Joanna
X.X		Approved	11.02.2014	Joanna
X.XX				ASSMANN WSW-No. AK672/2-X-BLACK
X.XXX				Drawing-No. ASS 7067 CA
DIM	TOL			rev00
X.°		① Drawn	11.02.2014	Joanna
Angle	TOL	Id.	Modification	Date



Replace Sheet