

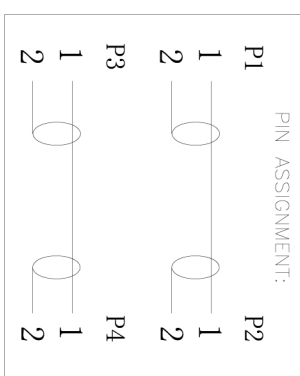


Units: mm

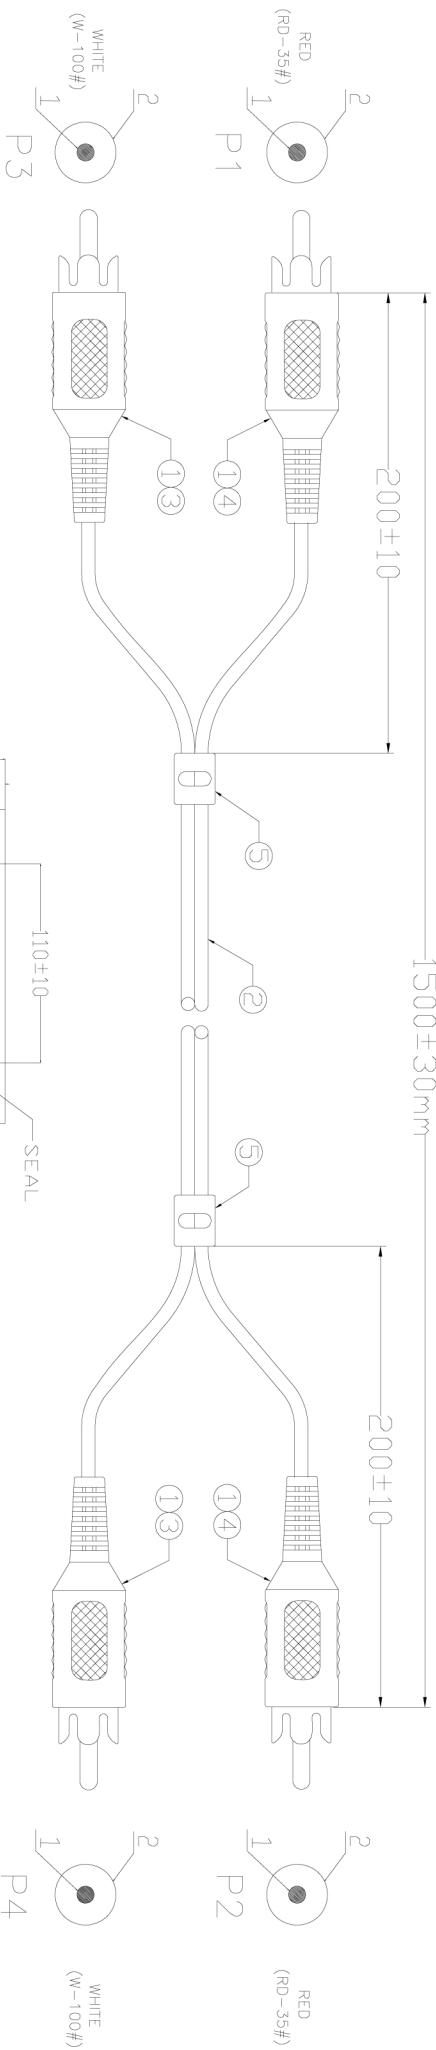

**Electrical test:**

1. 100% short, open, miswire test
2. Conduct resistance: 5 Ohm(max)
3. Insulation resistance: 10Mohm(min)
4. dielectric test: DC 300V

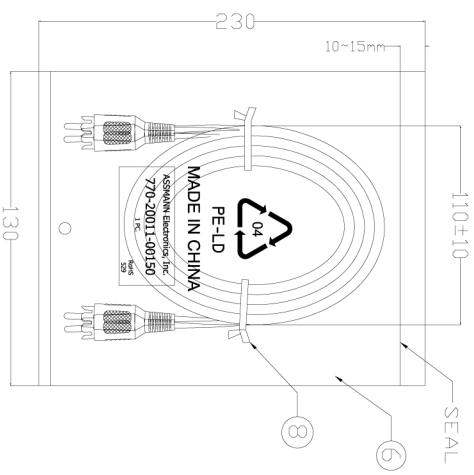

⑧	TIE	2	BLACK L=80mm
⑦	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑥	PE BAG	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
⑤	S/R	3.0g	BLACK PVC 40P (Mould NO.:SR-048)
④	IN JACKET	1.6g	CLEAR LD-PE (Mould NO.:NM-006)
	OUT JACKET	6.6g	PVC-40P RED(RD-35),(Mould NO.:WM-009)
③	IN JACKET	1.6g	CLEAR LD-PE (Mould NO.:NM-006)
	OUT JACKET	6.6g	PVC-40P WHITE(W-100)(Mould NO.:WM-009)
②	CABLE	1	NOUL 28#(10/0.10+28/0.10)*2F JACKET BLACK OD2.8*5.6mm
①	CONN	4	RCA PLUG MALE 梅花型 TYPE NI-PLATED INSULATOR COLOR:BROWN
NO.	NAME	QTY	SPECIFICATION

**NOTE:**  
 1.小PE袋对应料号,包袋数量及时间印刷样式:  
 CNC Tech, LLC  
 Industrial Cable and Connector Technology  
 770-20011-00150  
 10PCS  
 RoHS 2012  
 表示52/099年代每枚产品生产日期  
 印客人产品编号  
 印对应的袋数数量

2.外箱两个侧袋ITEM NO后面各贴一个35\*22mm ROHS标签。

# CNC Tech, LLC

Industrial Cable and Connector Technology

DRAWN BY	LICHENG	DRAWING NO.	VG/LJG-094-082-B
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	770-20011-00150
DECIDE BY		DATE	2012-12-28
VERSIONS/EDITEON	A/0	PROJECTION	