

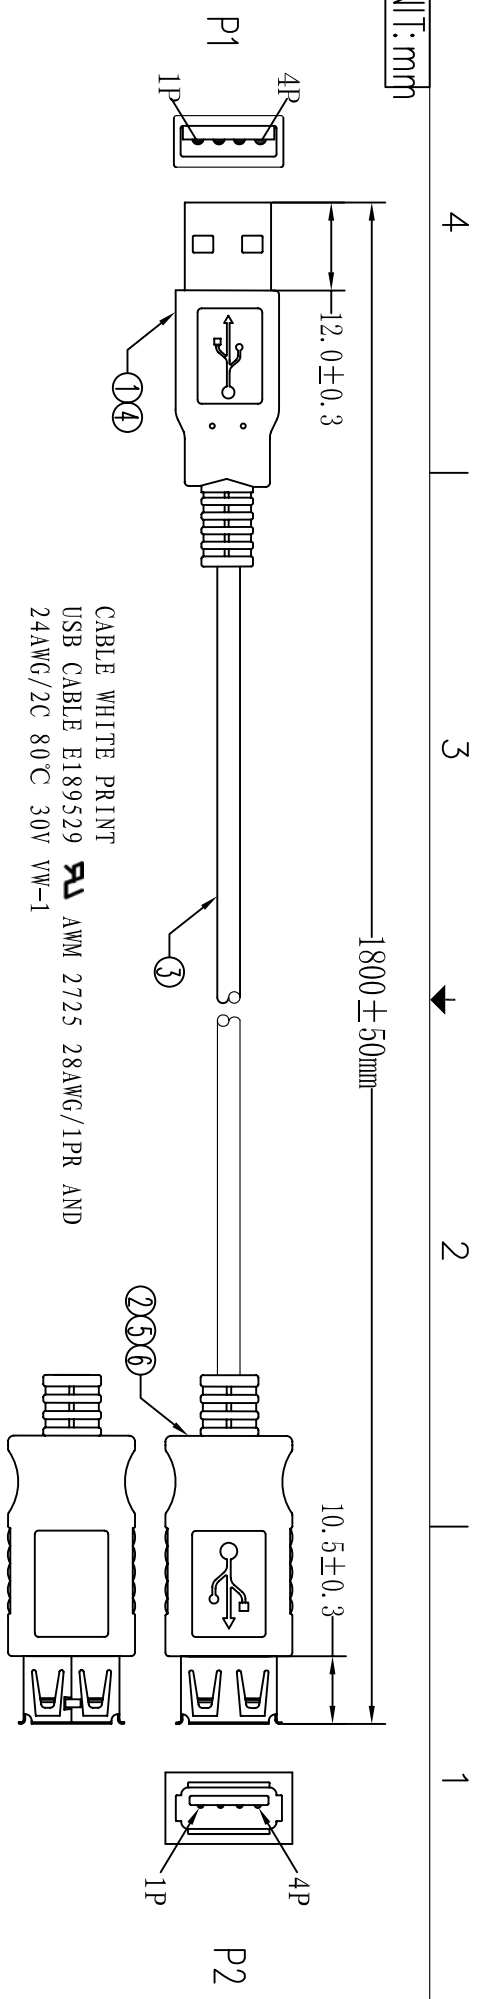


UNIT: mm

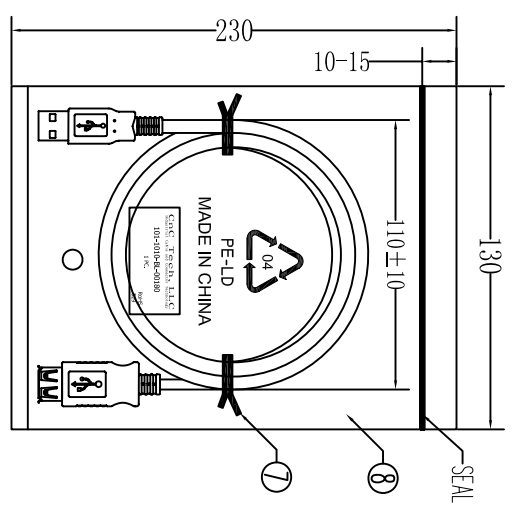

CABLE WHITE PRINT  
 USB CABLE E189529 **AWM** 2725 28AWG/1PR AND  
 24AWG/2C 80°C 30V VW-1

PIN ASSIGNMENT:

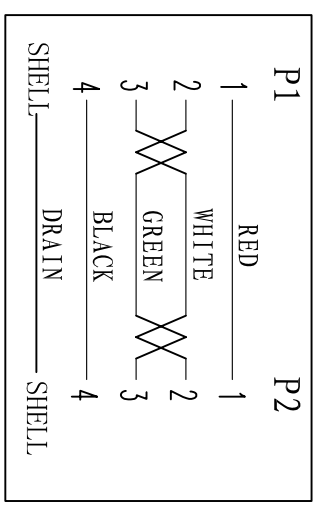

*Electrical test:*  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 2 Ohm(max)  
 3. Insulation resistance: 10Mohm(min)  
 4. dielectric test: DC 300V

⑨	PE BAG	1/10	CLEAR SIZE:280*330*0.05mm PRINT BLACK"MADE IN CHINA"-"10PCS"
⑩	PE BAG	1	CLEAR SIZE:130*230*0.05mm PRINT BLACK"MADE IN CHINA"-"1PC"
⑦	TIE	2	BLACK L=100mm
⑥	IN JACKET	3g	CLEAR LDPE(MOULD NO:NM-027)
⑤	OUT JACKET	7g	BLACK PVC-40P (MOULD NO:WM-83)
④	OUT JACKET	6g	BLACK PVC-40P (MOULD NO:WM-40)
③	CABLE	1	BLACK USB1.1 UL2725 28#/1P+24#/2C+AEB OD:4.7mm L=1800±10mm
②	CONN	1	USB A FEMALE SHELL:NICKEL PIN G/F SHORT TYPE INSULATOR COLOR:WHITE
①	CONN	1set	USB A MALE SHELL:NICKEL PIN G/F 3PCS TYPE INSULATOR COLOR:WHITE
NO	NAME	Q'TY	SPECIFICATION

**CNC Tech, LLC**  
 Industrial Cable and Connector Technology

DRAWN	Andy	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	101-1010-BL-00180
DECIDED		DATE	2013-08-23
VERSIONS/EDITION	A/0	PROJECTION	

A

B

C

D

A

B

C

D

4

3

2

1